


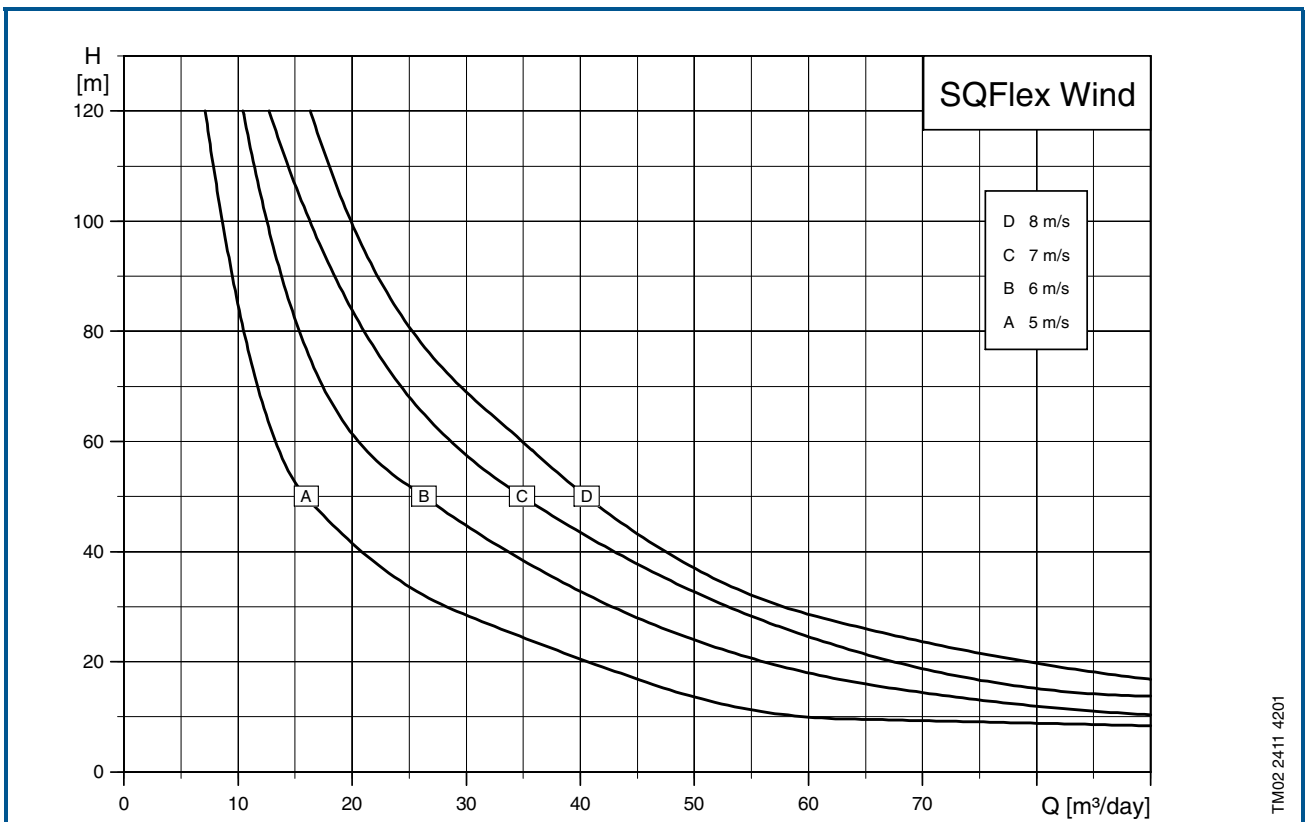
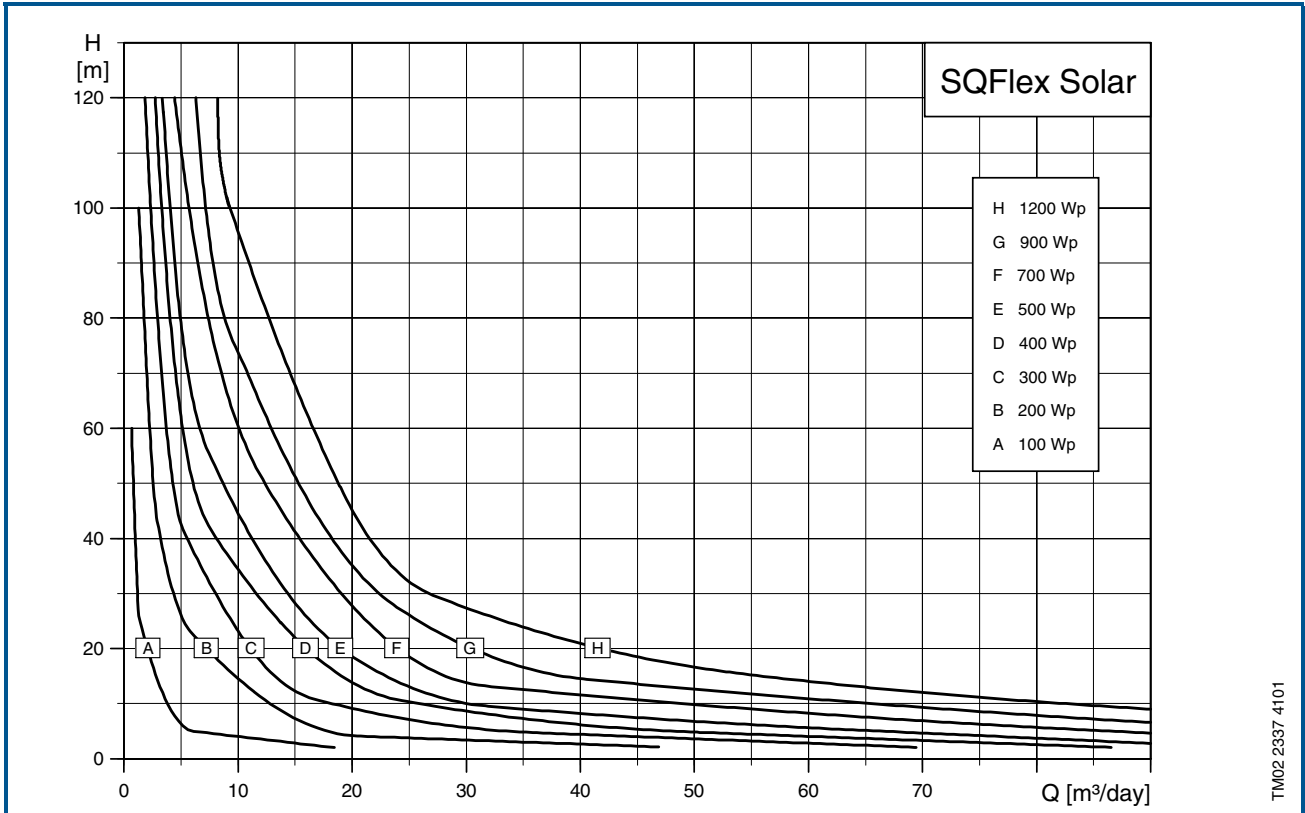
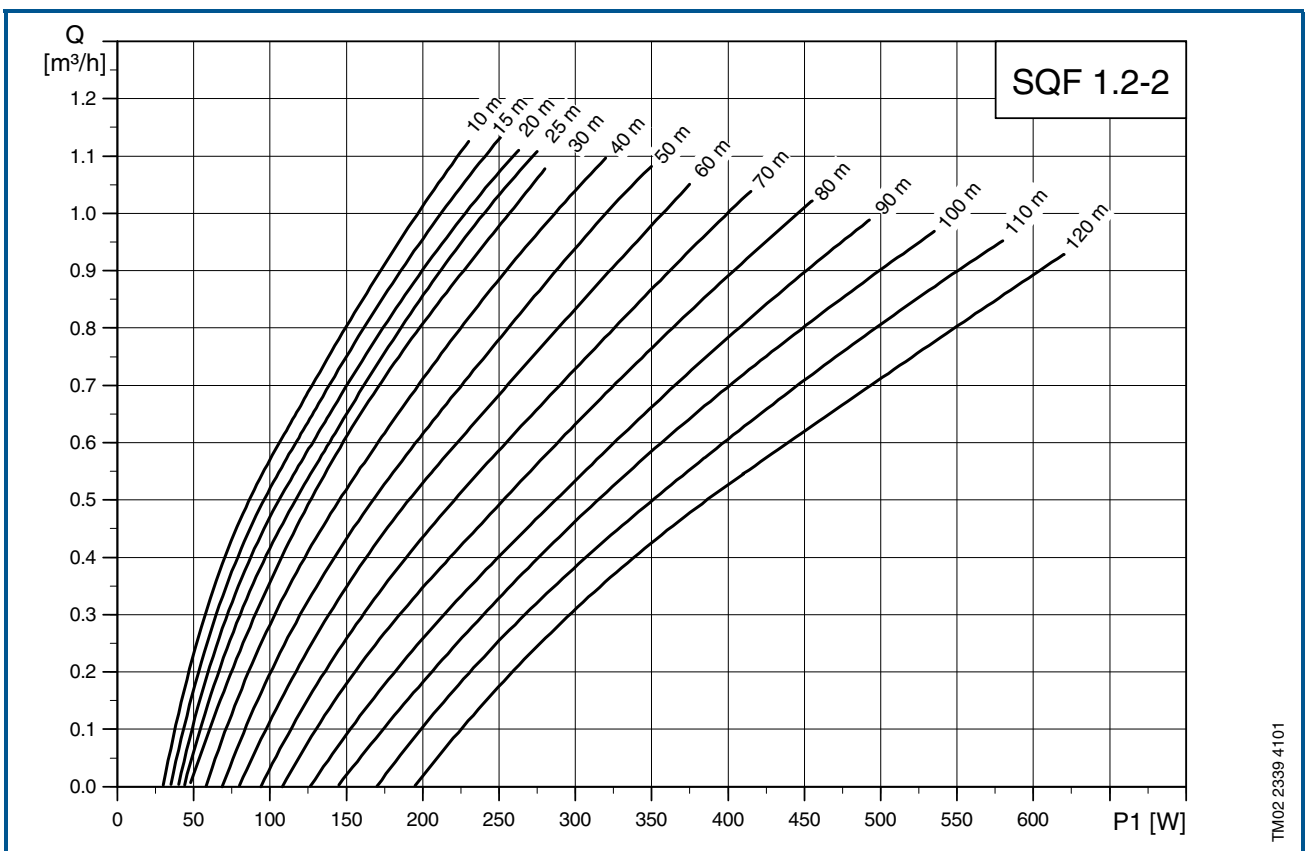




## Performance range

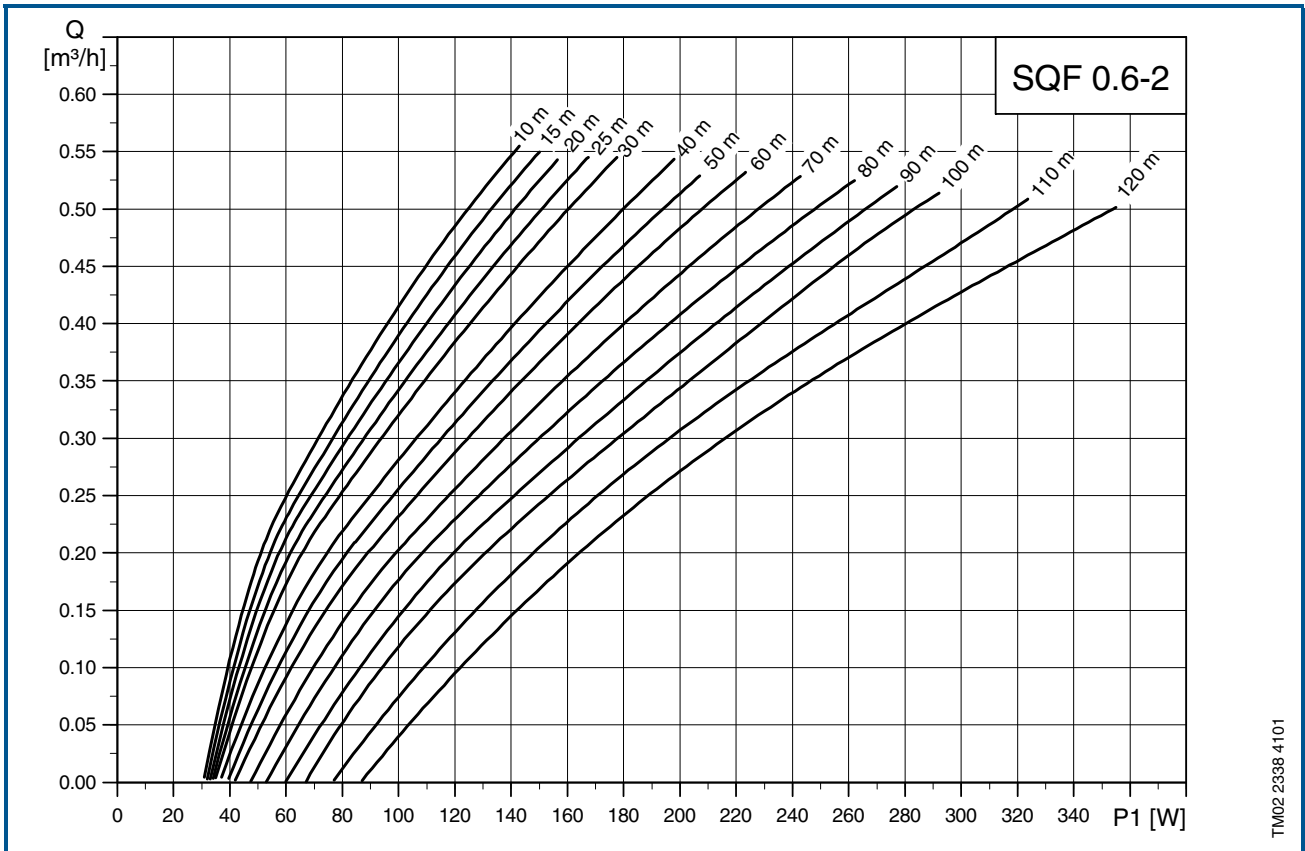


**Note:** Do not use the above curves for sizing of the pump.

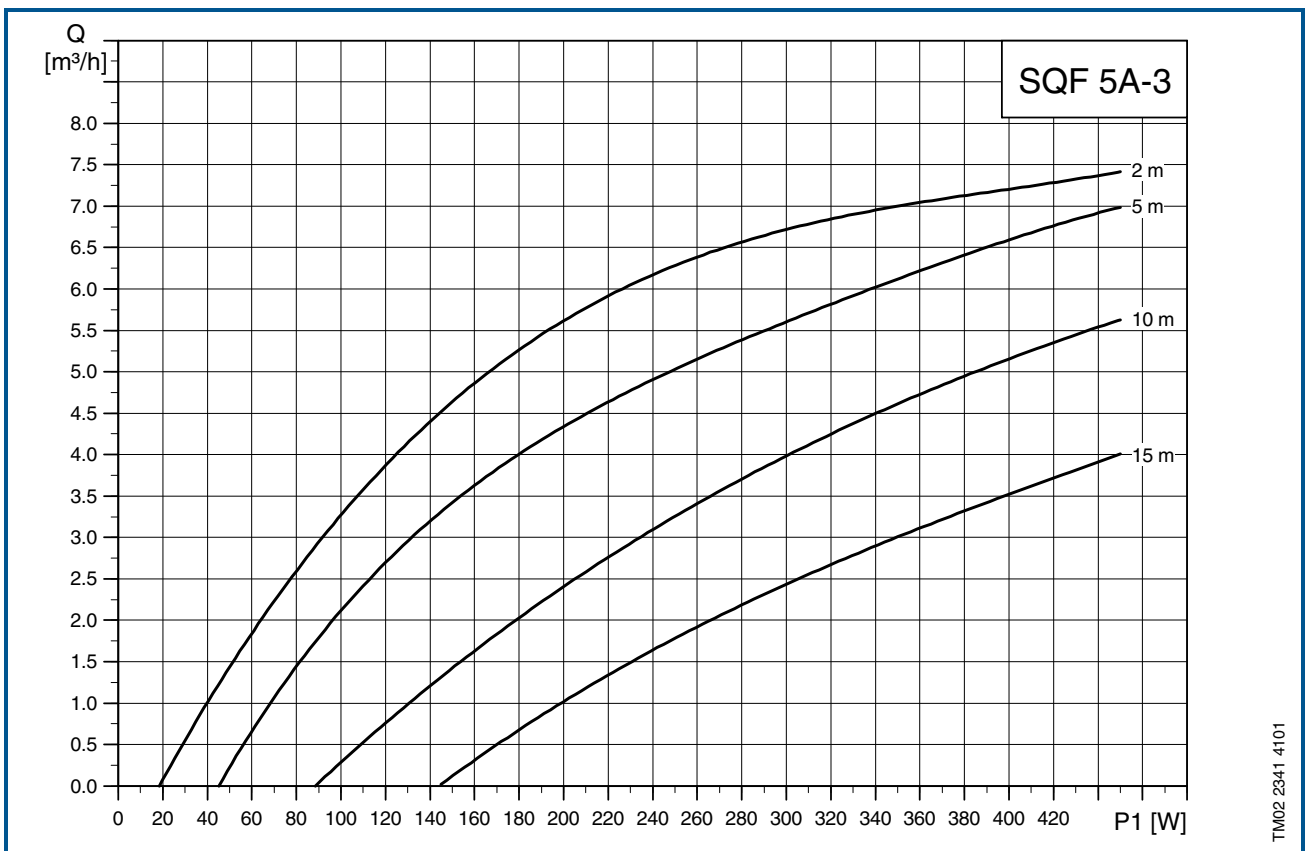

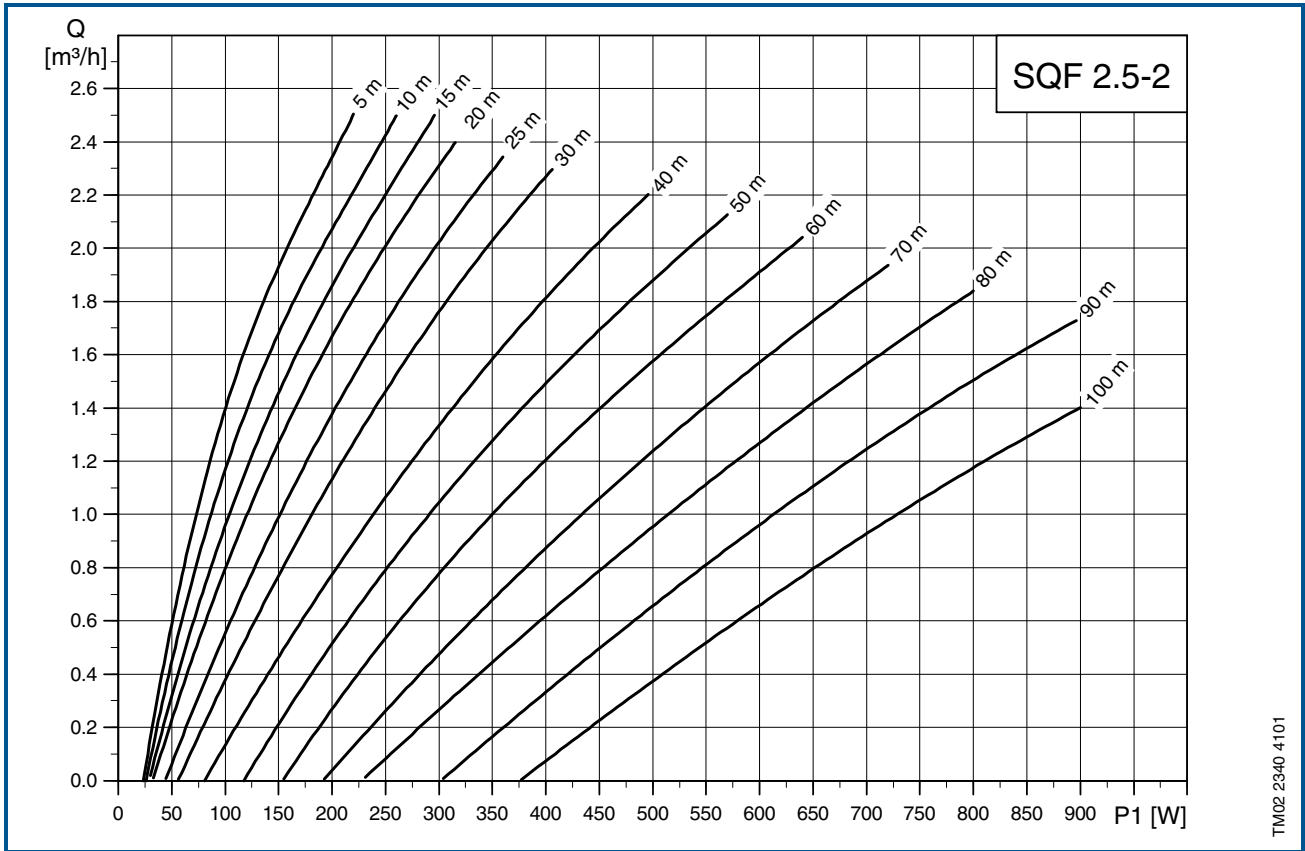


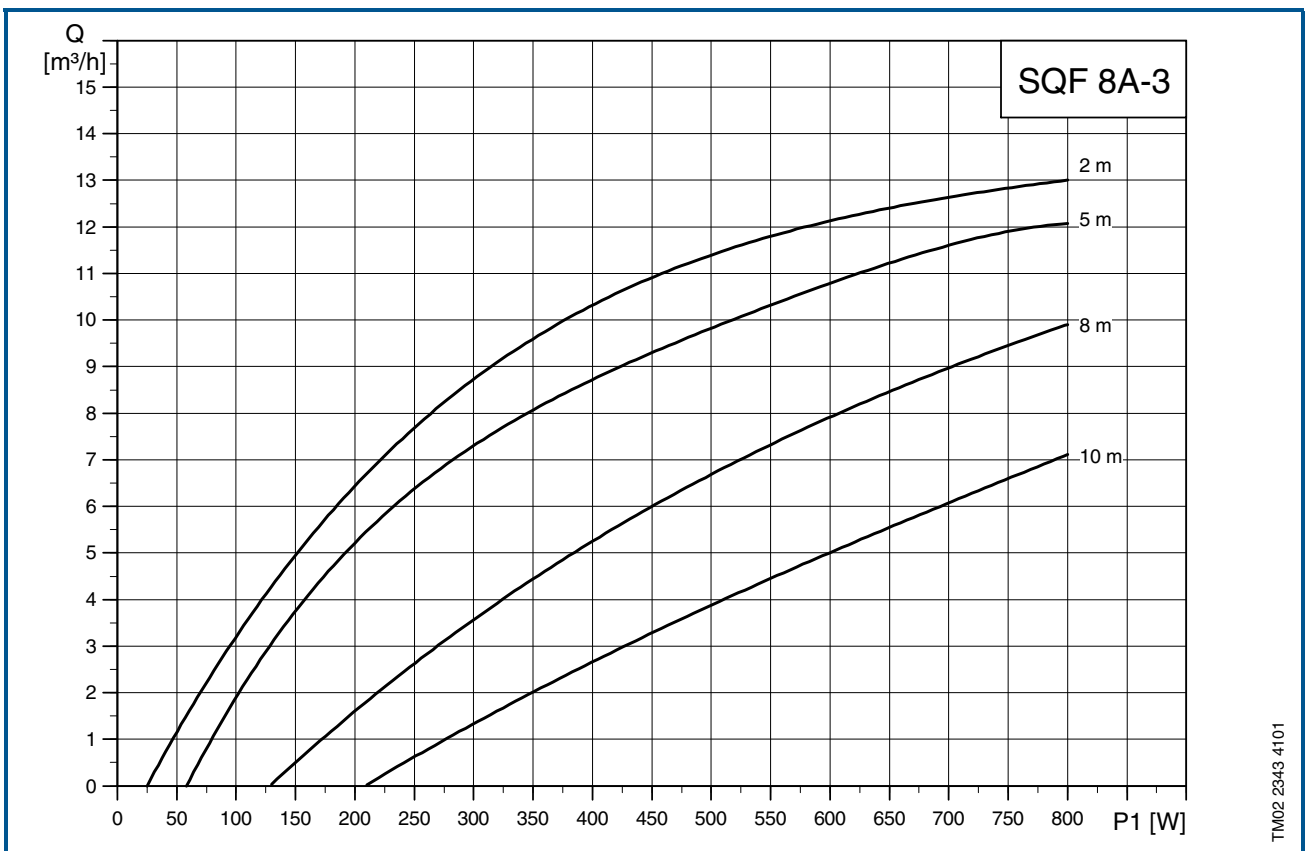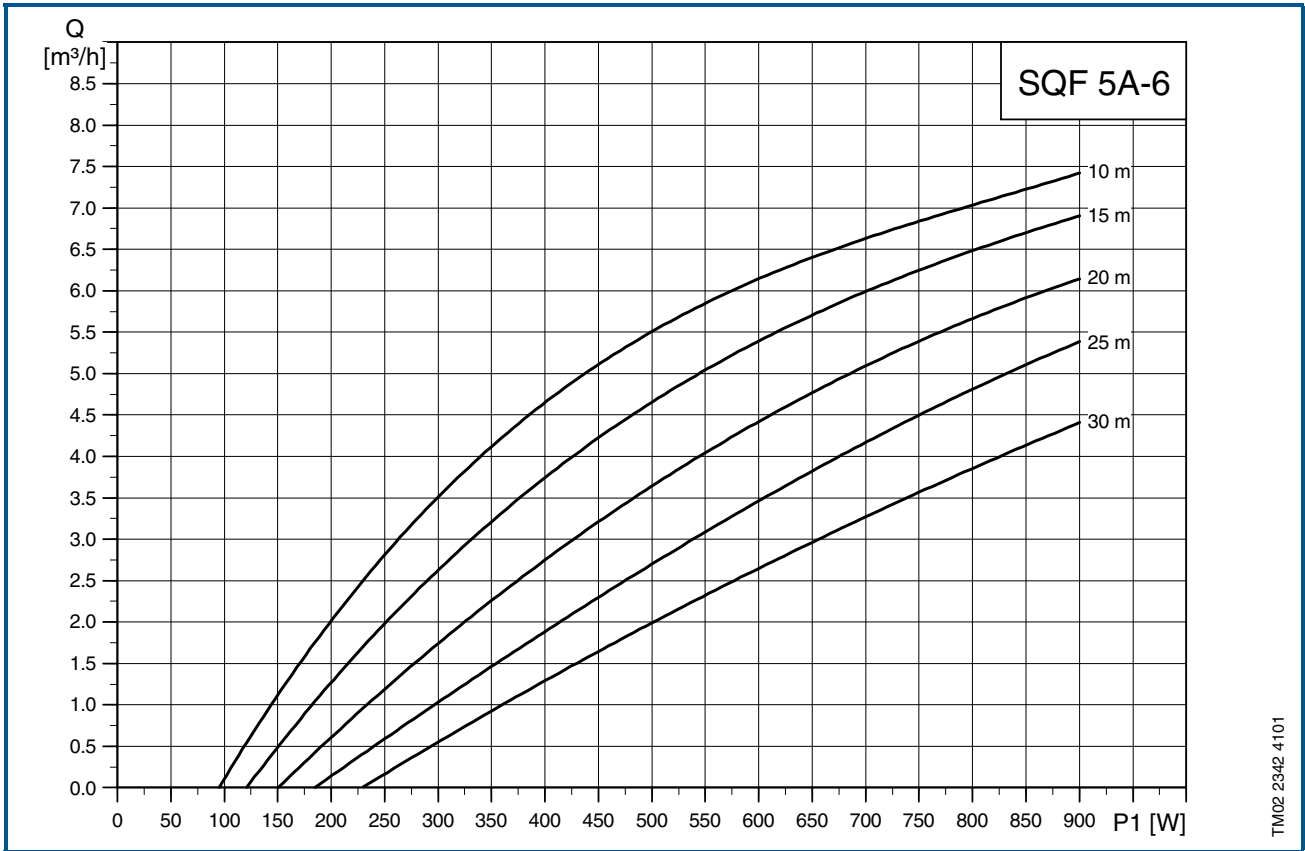

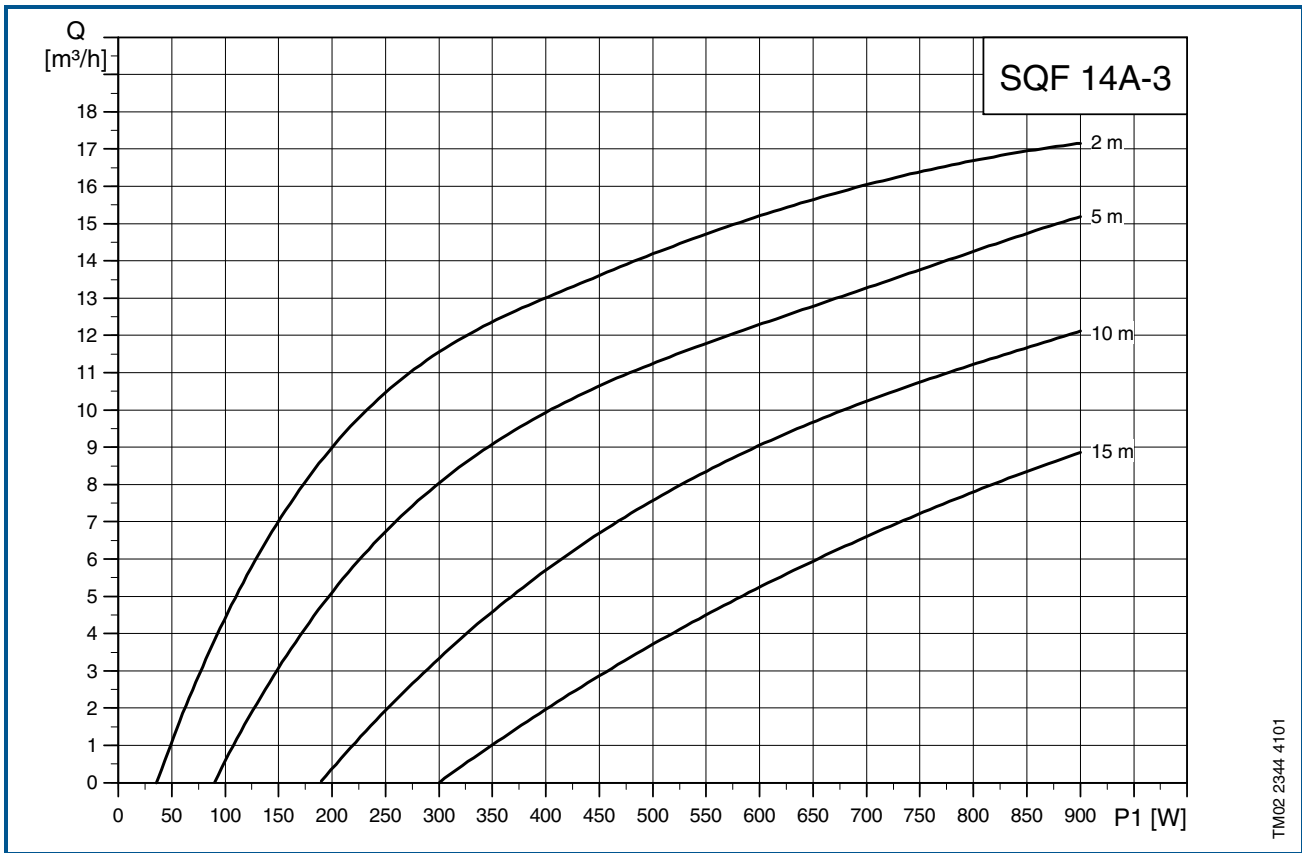

TM02 2344 4101

## Dimensions and weights

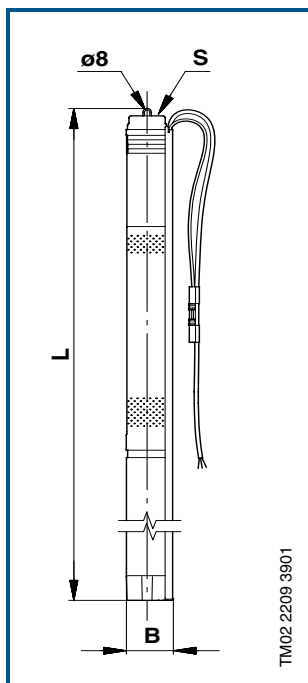

Pump type	Dimensions [mm]			Net weight [kg] ★	Brutto weight [kg] ★	Shipping volume [m³] ★
	L	B	S			
SQF 0.6-2	1185	74	Rp 1¼	7.6	9.4	0.0213
SQF 1.2-2	1225	74	Rp 1¼	7.9	9.7	0.0213
SQF 2.5-2	1247	74	Rp 1¼	8.2	10.0	0.0213
SQF 5A-3	815	101	Rp 1½	8.1	9.6	0.0160
SQF 5A-6	875	101	Rp 1½	8.8	10.3	0.0160
SQF 8A-3	920	101	Rp 2	9.5	11.0	0.0160
SQF 14A-3	975	101	Rp 2	10.9	12.4	0.0160

★ Pump complete

## Electrical data

30 - 300 VDC or 1 x 90 - 240 VAC, 50/60 Hz

Pump type	Motor type	Max. power input P <sub>1</sub> [W]	Max. current [A]
SQF 0.6-2	MSF 3	900	7
SQF 1.2-2	MSF 3	900	7
SQF 2.5-2	MSF 3	900	7
SQF 5A-3	MSF 3	900	7
SQF 5A-6	MSF 3	900	7
SQF 8A-3	MSF 3	900	7
SQF 14A-3	MSF 3	900	7